



INSTALLATION

BRAKE BLEEDER SCREW COVER 2018

PART#	INCLUDED
602018	1 Bleeder Screw Cover with 8/32 x 1/8 Loctite Screw
302018	1 Instruction Sheet

TOOLS SUGGESTED

5/64" Allen Wrench

PROCEDURE AVERAGE TIME: 5 MINUTES

STEP 1 Place the chrome cover over the bleeder fitting and rubber dust cap. The cut out in the cover should correspond with the tab on the dust cap.

STEP 2 Push the chrome cover down firmly, compressing the rubber cap so the cover meets the brake caliper.

STEP 3 Tighten the set screw with a 5/64" Allen wrench.

Ride On!

E-MAIL

techsupport@kuryakyn.com
or call 715.247.2983

WARRANTY

Kuryakyn™ warrants that any Kuryakyn product sold hereunder, if properly installed, maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of one (1) year from the date the Kuryakyn products are sold to the customer.


CONSEQUENTIAL DAMAGES:
Kuryakyn shall not be liable for any consequential or incidental damages.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2003 Kuryakyn USA™ All Rights reserved.

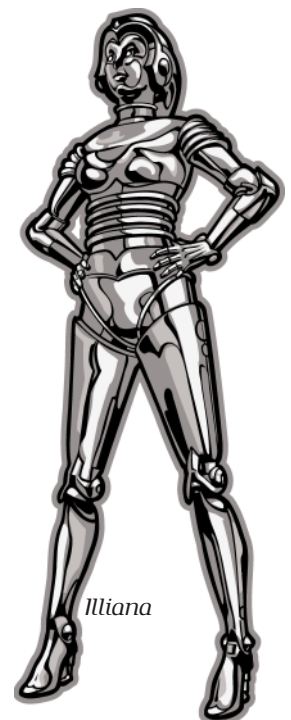

Illiana