



ROLL BAG

4142

FITS: SUITABLE FOR USE ON MOST TRUNK AND FENDER MOUNTED LUGGAGE RACKS

PART#	INCLUDED
604142	1 Rollbag
404141L	1 Retractable Cable Lock
404142C	1 Rain Cover
604142BC	2 Bungee Cord with Spring-Loaded Adjusters
404142S	2 Hook & Loop Strap (8" in length)
604142S	3 Hook & Loop Strap with Clip
304142	1 Instruction Sheet

NOTICE

Kuryakyn will not be held responsible for unsafe and improper loading or mounting of the Roll Bag. It is the user's responsibility to ensure the bag is positioned, fastened, and loaded so it does not adversely affect handling, control, or cause damage to the motorcycle.

GUIDELINES FOR USE

The Roll Bag includes a variety of straps to allow flexibility in mounting. Below are some general guidelines to assist in their selection and use.

HOOK & LOOP STRAPS WITH CLIPS

These straps will commonly be used to secure bag to a backrest, but may also be used on a luggage rack.

- Attach the clip to a D-ring
- Open the hook & loop end of the strap
- Route strap over, under, or around the backrest or luggage rack and through a D-ring on the opposite side of the bag.
- Pull the strap taut and fold it back on itself to secure.

HOOK & LOOP STRAPS

These straps will commonly be used in conjunction with Bungee Cords with Spring Loaded Adjusters to secure bag to trunk-mounted luggage racks.

- Slide the strap through a D-ring and around the luggage rack
- Hold one end of the strap stationary while pulling the other end to tighten the loop. Once taut, wrap the strap over itself (for maximum holding power, we recommend a minimum of 2-1/2" overlap).

BUNGEE CORDS WITH SPRING-LOADED ADJUSTERS

These will commonly be used in conjunction with Hook & Loop Straps to secure bag to trunk-mounted luggage racks.

- Press the button on the adjuster and remove ONE end of the bungee cord.
- Route the loose end through a D-ring and around the rack.
- Press the button on the adjuster and reinsert the loose end.
- Press the button and pull BOTH ends of the bungee cord through the adjuster until taut.

-cont.-

E-MAIL

techsupport@kuryakyn.com or call 715.247.2983

WARRANTY

Kuryakyn™ warrants that any Kuryakyn product sold hereunder, if properly installed, maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of one (1) year from the date the Kuryakyn products are sold to the customer.


CONSEQUENTIAL DAMAGES: Kuryakyn shall not be liable for any consequential or incidental damages.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today--select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2003 Kuryakyn USA™ All Rights reserved.

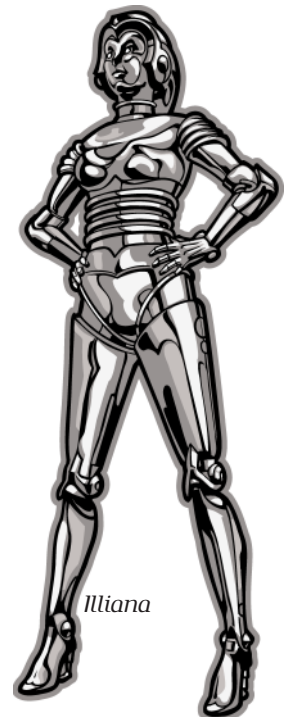

Illiana

WATER-RESISTANT RAIN COVER

A water-resistant rain cover has been supplied to protect the bag and its contents from inclement weather. It can be stowed neatly in one of the end pockets.

RETRACTABLE CABLE LOCK

404141L

STEP 1 See [PIC.1](#). To select a new combination for the lock, press button "A" and hold down. Push the cable end (labeled as "B") down/inward until you hear it click.


STEP 2 Choose your new combination by turning the three tumblers (labeled as "C") to a three-digit combination that you will remember. Then pull back up on the cable end to set your combination.

STEP 3 Press down on the "A" button to pull the cable end out. Plug the cable end into the cable lock receptacle (labeled as "D") until you hear it click into the locked position. If you have too much slack in the cable, press the "A" button to recoil the slack amount of cable. Turn the tumblers to a position that is NOT your chosen combination to lock the mechanism.

STEP 4 To unlock, turn the tumblers to your chosen combination and press the "E" button to release the cable and the "A" button to recoil the cable.

Ride On!

PIC.1

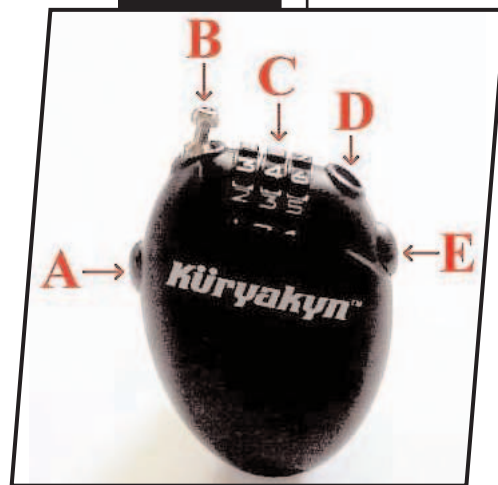

PAGE

2